


MEGALINEAR FC T5

T 5						
STANDAR WIDTHS (mm)	25	32	50	75	100	150
Width tolerance(mm)	+/- 0,25	+/- 0,25	+/- 0,5	+/- 0,5	+/- 0,75	+/- 0,75

SMOOTH SURFACE
Standard compound:

dark blue Polyurethane thermoplastic 85 ShA
2,8 +/- 0,3 mm
0 mm
S and Z torsion Kevlar
50 m



Total Thickness :
Height of the profile:
Standard cords:
Standard roll length:

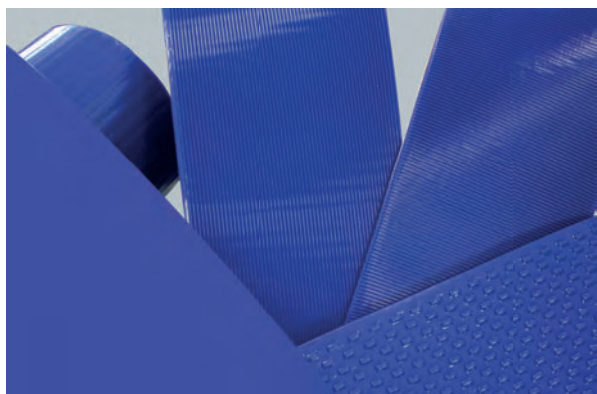


Belts produced with raw materials, in compliance with:
- FDA 21 CFR 177.2600 / 177.105 / 177.1680 (USA)
- USDA - NSF/ANSI/3-A 14159-3 – 2010 Hygienic Design (Meat and Poultry Processing).

-European Directives 82/711/EEC, 85/572/EEC, 93/8/EEC e 97/48/EEC
-Regulation (EC) n° 1935/2004 (art. 3, art.11, par.5, art.15, art.17) e 1895/2005 and (EU) n° 10/2011
-Belts produced according to the Regulation (EU) n° 2023/2006 GMP (Good Manufacturing Practice).


SMOOTH

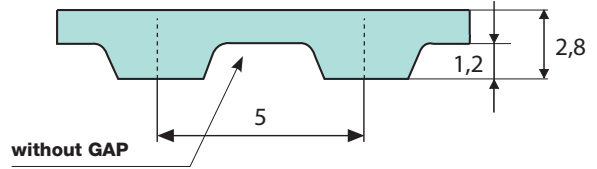


Standard Surfaces	Total Thickness	Profile Height	Roll Length
Smooth	2,8 +/- 0,3 mm	0 mm	50 m
Longitudinal Ribbed	4,0 +/- 0,3 mm	1,25 mm	50 m
Transversal Ribbed	4,0 +/- 0,3 mm	1,25 mm	50 m
Noppen Oval	5,2 +/- 0,3 mm	2,1 mm	50 m
Roof	Not currently available in T5 pitch		
Spike Top	4,1 +/- 0,3 mm	1,3 mm	50 m




LONGITUDINAL RIBBED



TRANSVERSAL RIBBED



NOPPEN OVAL



SPIKE TOP

T 10						
STANDAR WIDTHS (mm)	25	32	50	75	100	150
Width tolerance(mm)	+/- 0,25	+/- 0,25	+/- 0,5	+/- 0,5	+/- 0,75	+/- 0,75

SMOOTH SURFACE

Standard compound:

dark blue Polyurethane thermoplastic 85 Sha

Total Thickness :

4,8 +/- 0,3 mm

Height of the profile:


0 mm

Standard cords:

S and Z torsion Kevlar

Standard roll length:

50 m

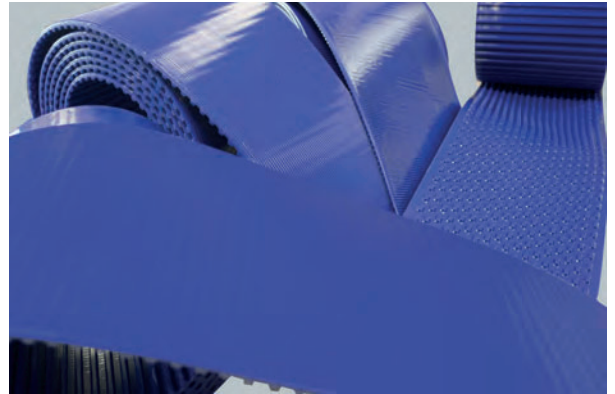

Belts produced with raw materials, in compliance with:



- FDA 21 CFR 177.2600 / 177.105 / 177.1680 (USA)
- USDA - NSF/ANSI/3-A 14159-3 – 2010 Hygienic Design (Meat and Poultry Processing).

-European Directives 82/711/EEC, 85/572/EEC, 93/8/EEC e 97/48/EEC


-Regulation (EC) n° 1935/2004 (art. 3, art.11, par.5, art.15, art.17) e 1895/2005 and (EU) n° 10/2011

-Belts produced according to the Regulation (EU) n° 2023/2006 GMP (Good Manufacturing Practice).


SMOOTH

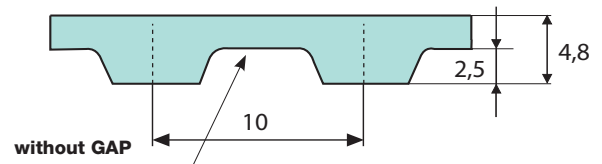


Standard Surfaces	Total Thickness	Profile Height	Roll Length
Smooth	4,8 +/- 0,3 mm	0 mm	50 m
Longitudinal Ribbed	6,05 +/- 0,3 mm	1,25 mm	50 m
Transversal Ribbed	6,05 +/- 0,3 mm	1,25 mm	50 m
Noppen Oval	7,7 +/- 0,3 mm	2,1 mm	50 m
Roof	6,2 +/- 0,3 mm	1,7 mm	50 m
Spike Top	6,1 +/- 0,3 mm	1,3 mm	50 m




LONGITUDINAL
RIBBED




TRANSVERSAL
RIBBED



ROOF



NOPPEN OVAL



SPIKE TOP